



**HAL**  
open science

## Optimization of a hybrid process combining nanofiltration and electro dialysis for the treatment of surface water in the Mekong Delta region

Linh Duy Nguyen, Mohamed Ayman Kammoun, Minh Quang Bui, Philippe Sostat, André Deratani, François Zaviska

► **To cite this version:**

Linh Duy Nguyen, Mohamed Ayman Kammoun, Minh Quang Bui, Philippe Sostat, André Deratani, et al.. Optimization of a hybrid process combining nanofiltration and electro dialysis for the treatment of surface water in the Mekong Delta region. *Journal of Cleaner Production*, 2022, 365, pp.132694. 10.1016/j.jclepro.2022.132694 . hal-04066266

**HAL Id: hal-04066266**

<https://hal.umontpellier.fr/hal-04066266v1>

Submitted on 9 Oct 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# 1 Optimization of a hybrid process combining Nanofiltration and 2 Electrodialysis for the treatment of surface water in the Mekong 3 Delta region

4 Linh Duy Nguyen<sup>1,2</sup>, Mohamed Ayman Kammoun<sup>1</sup>, Minh Quang Bui<sup>2</sup>, Philippe Sizat<sup>1</sup>,  
5 André Deratani<sup>1,\*</sup>, François Zaviska<sup>1</sup>

6 <sup>1</sup> Institut Européen des Membranes – IEM, UMR5635 ENSCM, CNRS, Univ Montpellier,  
7 Montpellier, France

8 <sup>2</sup> Institute of Environmental Technology, Vietnam Academy of Science and Technology (IET-  
9 VAST), Hanoi, Vietnam.

10

11 **Keywords:** Desalination; pesticide removal; hybrid process; optimization; experimental  
12 design method.

13

14 \* Corresponding author. *Email address:* andre.deratani@umontpellier.fr (A. Deratani)

15

## 16 Abstract

17 The coastal area of the Mekong Delta is facing a huge problem of water supply quality due to  
18 pesticide (intensive agriculture) and salinity (sea water intrusion) contamination. Their  
19 simultaneous presence makes this water complex and requires advanced water treatment  
20 processes in order to meet the Vietnamese Guideline for drinking water quality. The objective  
21 of this work is to develop an efficient surface water treatment based on electrodialysis and  
22 nanofiltration technologies. The approach consists in using electrodialysis in a first stage for  
23 salinity removal to improve, in the second stage, the performance of nanofiltration for the

1 removal of pesticides. The question that arises is to what extent should electro dialysis  
2 desalination be carried out in order to effectively remove the pesticide and salinity in the  
3 second stage (nanofiltration) at a reasonable cost? To answer this question, an experimental  
4 design methodology was employed to describe and optimize the entire hybrid system.  
5 Experiments carried out under the optimal conditions deduced from the modeling gave  
6 experimental results in good agreement with the predictions allowing to validate the  
7 optimization approach.

8

## 9 **1 Introduction**

10 Access to safe drinking water is one of the most important challenges facing the world today,  
11 especially in the rural area of Mekong Delta, Vietnam (Grady *et al.*, 2018). The Mekong Delta  
12 region is famous for its abundant surface water resource from an interlacing network of rivers  
13 and canals (Renaud and Kuenzer, 2012; Whitehead *et al.*, 2019). Water quality in the main  
14 river channels is generally good since pollutants and contaminants are often diluted due to the  
15 enormous volumes of water. However, the surface water sources to which rural people have  
16 direct access for daily use come from smaller tributaries and canals near their homes. They  
17 contain a significantly higher concentration of pollutants and contaminants (Ly and Giao,  
18 2018; Minh *et al.*, 2019).

19 Pesticide pollution in the Mekong delta is due to the co-occurrence of recently used  
20 pesticides. Their residues were detected and frequently exceed the guideline concentrations in  
21 many rivers and canals. It has been reported (Carvalho *et al.*, 2008) that the concentration of  
22 diazinon, and fenotrothion were from 0.003 to 0.043  $\mu\text{g/L}$  in canal water samples near rice  
23 field. A study conducted in the two provinces of Can Tho and Dong Thap (Pham *et al.*, 2013)  
24 has revealed the presence of commonly used pesticide residues at high concentration in the

1 irrigation canals. In particular, isoprothiolane was detected in 100 % of the samples with the  
2 maximum concentration of 11.24  $\mu\text{g/L}$ , followed by fenobucarb in 90.8 % of the samples with  
3 concentration ranging from 0.02 to 1.43  $\mu\text{g/L}$ . Other pesticides with a high frequency in the  
4 sample analyzed were pretilachlor (68.9 %), buprofezin (58.7 %), fipronil (48.5 %) and  
5 propiconazole (45.9 %). The presence of these pesticides in canal waters in An Giang  
6 Province has also been reported with over 80 % of the samples containing more than five  
7 pesticides simultaneously and 95 % of samples exceeding the EC guideline value for  
8 concentration of total pesticides in drinking water (0.5  $\mu\text{g/L}$ ) (Chau *et al.*, 2015). Based on the  
9 data presented above, the three most frequently detected pesticides were fenobucarb (an  
10 insecticide), isoprothiolane (a fungicide) and pretilachlor (an herbicide). These molecules  
11 were chosen for this study as representative of the pesticides that can be found in the surface  
12 waters of the Mekong Delta.

13 Before being used, rural people treat surface water by a basic method such as removing  
14 sediments with aluminium sulphate, followed by boiling. These procedures make the water  
15 appearance “cleaner”, but they pose a potential threat to human health. It has been proved that  
16 boiling can remove most pathogens in water, but can actually increase the concentration of  
17 pesticides present (Pham *et al.*, 2013). In addition, some pesticides have also been detected at  
18 concentrations above the European Commission’s guideline values for drinking water in some  
19 purchased bottled water, which is generally considered safer water, (Chau *et al.*, 2015). Thus,  
20 more effective water treatment methods need to be implemented at the household level in  
21 Mekong Delta rural area.

22 Accordingly, the integration of two different membranes technologies, namely electrodialysis  
23 (ED) and nanofiltration (NF), has been proposed to treat surface water in the coastal area of  
24 the Mekong Delta (Nguyen *et al.*, 2019). This original combination seems to be well suited  
25 for the treatment of complex water containing biological pollution, high salinity and a high

1 concentration of pesticides. On one hand, NF is probably the most polyvalent membrane  
2 separation technique, which is characterized by a very high efficiency for the removal of  
3 biological compound, organic and inorganic compounds removal at a reasonable operating  
4 cost. NF is a membrane pressure driven process where pollutants are retained by both steric  
5 and electrostatic repulsion (Donnan) effect. Many applications for the treatment of water  
6 containing organic pollutants can be found in literature, such as the removal of pesticides and  
7 other micropollutants (Miralles-Cuevas *et al.*, 2014; Nghiem *et al.*, 2004; Ormad *et al.*, 2008;  
8 Park and Snyder, 2020; Vergili, 2013; Wang *et al.*, 2021), and that of pesticides and salts or  
9 inorganic pollutants at the same time (Košutić *et al.*, 2005; Nikbakht Fini *et al.*, 2019; Qiu *et*  
10 *al.*, 2009; Sarkar *et al.*, 2007; Thanuttamavong *et al.*, 2002; Van der Bruggen *et al.*, 2001).  
11 Concerning more specifically the removal of pesticides by NF, the rejection efficiency  
12 strongly depends on the membrane characteristic (membrane cut-off, materials,  
13 hydrophilicity, electrical charge...), the nature of the pesticide molecule (size, hydration  
14 radius, electrical charge, steric configuration, hydrophilicity...) and also on the  
15 presence/concentration of other compounds such as salts and organic matter. In particular, it  
16 has been proven that salinity has a strong negative impact on organic micropollutant retention  
17 (Nguyen *et al.*, 2019; Plakas and Karabelas, 2008; Ren *et al.*, 2017; Zhang *et al.*, 2006). This  
18 effect has been explained by pore swelling, decrease of solute hydrodynamic radius (Stokes  
19 radius), possibly due to partial dehydration, or a combination of the above (Ren *et al.*, 2017;  
20 Teixeira *et al.*, 2005; Zhang *et al.*, 2006; Zhao *et al.*, 2005). On the other hand, ED can easily  
21 remove salinity by extracting ions through ion exchange membranes placed in an electrical  
22 field. Compared to other desalination membrane technologies based on pressure or thermal  
23 action, ED targets ions instead of the solvent. Therefore, ED is more energy efficient for  
24 treating water with salinity below 6 g/L (Al-Karaghoulis and Kazmerski, 2013; Patel *et al.*,  
25 2020) and much more flexible in terms of treatment. Indeed, the desalination rate can be

1 adapted by simply adjusting the electrical charge and the hydraulic retention time. However,  
2 this technology cannot remove pesticides, as most of these substances are neutral and cannot  
3 be transported through the membrane by electrical force.

4 In a previous work (Nguyen *et al.*, 2019), the feasibility of the hybrid process coupling ED  
5 and NF for the treatment of surface water in the coastal area of Mekong Delta has been  
6 evaluated. In this context, ED has been proposed as a pre-desalination step during the dry  
7 season in order to improve the retention efficiency of pesticides in the subsequent NF stage  
8 and also to enhance the overall salinity retention. It was found that a tight NF membrane such  
9 as NF90 leads to produced water with a quality complying with the VN guideline for drinking  
10 water. As previously mentioned, the specific energy consumption of ED varies greatly with  
11 the quantity of salt to be extracted, whereas that of NF depends on the conversion rate. In  
12 order to develop an energy-efficient system in the context of an implementation in the rural  
13 area of the Mekong Delta, it is critical to optimize the energy consumption of both stages ED  
14 and NF.

15 The present report aims at proposing clues for optimizing the overall performance of the ED -  
16 NF integrated system in terms of pollutant removal and energy consumption for treatment of  
17 matrices as complex as surface water in the Mekong Delta. The challenge in optimizing the  
18 hybrid ED-NF process is that the performance of the first stage significantly affects the  
19 efficiency of the second stage and then the cost of the overall process. For example, if the  
20 salinity of the feed water was not sufficiently removed by ED, the pesticide removal capacity  
21 by NF would be remarkably reduced due to the swelling effect of the membrane pores  
22 (Nguyen *et al.*, 2019). Otherwise, the energy consumption of ED would increase, if the TDS  
23 concentration of the diluted compartment continued to decrease. Thus, each operation  
24 parameter in the two stages is influenced by the others. In other words, the hybrid system is a  
25 non-linear system, in which the outputs must involve not only the relationship with single

1 parameters, but also the interaction or combination between the parameters. The biggest  
2 problem in the application of non-linear methods to solve such systems arises from the often  
3 extreme sensitivity to noise (experimental measurement uncertainties) and the difficulty in  
4 choosing a good non-linear fitting function in the absence of a suitable physical model. Linear  
5 methods are more robust, less sensitive to noise, simpler to implement, and can lead to  
6 reasonable predictions for quantities by getting the trends right, although finer details may be  
7 lost by using a linear method for an inherently nonlinear system

8 Therefore, in order to determine the best compromise between removal efficiency and energy  
9 consumption, a multi-variable analysis based on response surface design was used to optimize  
10 the whole ED - NF system. Experimental design methodology (RSM) is a statistical tool than  
11 can be used to accurately assess the effect of the main parameters affecting each step as well  
12 as the interactions between the parameters of the entire hybrid process (Mäkelä, 2017).  
13 However, such a methodology may require a large number of experiments depending on the  
14 number of parameters involved. A specific approach was developed in order to minimize the  
15 number of experiments while maintaining a sufficient degree of information for accurate  
16 experimental modelling. Based on the developed models, an optimization was carried out  
17 taking into account the efficiency in terms of desalination rate and pesticide removal as well  
18 as the operating cost (energy consumption and membrane surface area). The optimal  
19 conditions determined by the modeling were then validated experimentally.

20

## 21 **2 Materials and methods**

### 22 *2.1 Chemicals*

23 All pesticides, organic solvents and inorganic salts used in this study were obtained from  
24 Sigma Aldrich at the analytical grade. Stock solutions of the pesticides isoprothiolane,

1 fenobucarb and pretilachlor were prepared in acetonitrile/water (50:50) at a concentration of  
2 1000 mg/L and stored at 4 °C. Milli-Q water (at 18 MΩ.cm<sup>-1</sup>) was used for the whole  
3 experiment.

#### 4 2.2 *Synthetic Mekong Delta surface water*

5 Ion composition of the synthetic Mekong Delta solution is shown in Table 1. These ion  
6 concentrations correspond with their concentration at median values in the Mekong Delta  
7 surface water in coastal areas during the dry season (Nguyen *et al.*, 2020).

8

9

10 **Table 1**

11 Ion composition (mg/L) of the synthetic salt solution

Ion composition	Na <sup>+</sup>	Mg <sup>2+</sup>	Ca <sup>2+</sup>	Cl <sup>-</sup>	SO <sub>4</sub> <sup>2-</sup>	TDS
Concentration (mg/L)	1721	258	59	3197	459	5693

12

13 The pesticide concentrations in the synthetic solution were 300, 300 and 1000 ppb for  
14 fenobucarb, isoprothiolane and pretilachlor, respectively. These concentrations were chosen  
15 based on the instrument limit detection, so that pesticide residues in the permeate could be  
16 determined with enough accuracy, even if removal values are greater than 95%. The pH of the  
17 solution was 5.9 – 6.2.

#### 18 2.3 *Membranes selection*

19 In the ED stage, the PC-SK and PC-SA membranes (PCA GmbH, Germany) were chosen as  
20 cation and anion exchange membranes, respectively, while in the NF stage, NF90 (Dow-  
21 Filmtech, DuPont Water Solutions, USA) was used. The latter membrane was selected to



1 achieve the best compromise in terms of salinity rejection, pesticide rejection and  
2 permeability (Nguyen *et al.*, 2019).

### 3 2.4 Pesticide and ions analysis

4 Pesticide concentration was determined by direct injection liquid chromatography with  
5 tandem mass spectrometry method (DI-LC/MS/MS) by using Waters instruments  
6 (Wythenshawe, Manchester, UK). The analytical conditions and the detection limit were  
7 described in a previous study (Nguyen *et al.*, 2019).

8 The ion concentration was determined by ion chromatography (ICS-900, Dionex) and the  
9 conductivity was measured by a conductivity meter (Cond 315i, WTW).

### 10 2.5 ED – NF integrated membrane experiments

11 The membrane set-up and the operating procedures were similar to those used in a previous  
12 report (Nguyen *et al.*, 2019).

#### 13 2.5.1 ED stage

14 The ED experiments were carried out on a PCCell ED 64-004 cell (PCA GmbH, Heusweiler,  
15 Germany) with 7 pieces of the PC-SA and 8 pieces of the PC-SK and a pair of electrodes  
16 made of Pt/Ir-coated titanium. The active membrane area was 64 cm<sup>2</sup>. Flow paths of the  
17 diluate stream (referred to as ED permeate in this study) and concentrate stream were formed  
18 by plastic spacers between the membranes with width of 0.5 mm and their flow rate were  
19 maintained at 0.5 L/min. Initial concentrate stream was filled with 0.8 L synthetic solution.  
20 One liter of Na<sub>2</sub>SO<sub>4</sub> 0.2 mol/L solution was used as the electrode rinsing solution with flow  
21 rate maintained at 1.0 L/min.

1 ED operating conditions for ED, including applied voltage (V), which is controlled at a  
2 constant value during each experiment, permeate volume (L) and processing time (min), were  
3 setup for each experiment in the Box Behnken design.

#### 4 2.5.2 NF stage

5 The NF stage was carried out in an NF pilot equipped with an Osmonics Sepa CF II cell  
6 (Sterlitech Corp., Kent, WA). The NF90 membrane coupons of 140 cm<sup>2</sup> surface area were  
7 rinsed and conditioned at 15 bar during 1 hour inside the NF pilot before being used. Then,  
8 the tank of the NF pilot was filled with 5 L of feed solution and the experiment was  
9 performed. The NF operating conditions such as applied pressure (bar), feed concentration  
10 (mg/L) and NF processing time (min) were setup for each experiment in the Box Behnken  
11 design. The feed solution temperature was kept constant at 25.0 ± 0.5 °C. The membrane  
12 rejection  $R$  was calculated from the pesticide concentration in the feed solution and the  
13 permeate according to equation 1:

$$14 \quad R = \left(1 - \frac{C_p}{C_f}\right) \times 100 \quad (1)$$

15 where  $C_p$  and  $C_f$  are the concentration of pesticides (mg/L) in the permeate and the feed  
16 solution, respectively.

#### 17 2.6 Energy consumption calculation

18 In this study, one of the important parameters for evaluating process efficiency is energy  
19 consumption.

20 The specific energy consumption ( $SEC$ ) often used to characterize the energy cost of the NF  
21 process is the energy (from pump) needed to produce one cubic meter of permeate at the  
22 desired water recovery.  $SEC_{NF}$  of the pump in kWh/m<sup>3</sup> is calculated by equation 2:

$$23 \quad SEC_{NF} = \frac{\Delta P}{36 \eta \gamma} \quad (2)$$

1 where  $\Delta P$  is the trans-membrane pressure (bar);  $\eta$  is the pump efficiency, assumed to be 0.8 in  
2 this study;  $\gamma$  is the water recovery by the process and equals the ratio of the volume of the  
3 permeate and the feed obtained after each experiment.

4 In the ED process, the electrical energy is consumed by the ED cell and the solution  
5 circulation pumps. In this study, only the energy consumed by the ED cell was taken into  
6 account, assuming that the consumption of pumps contributed negligibly to the overall energy  
7 consumption under the operating conditions.

8 The specific energy consumption of the ED cell ( $SEC_{ED}$ , in kWh/m<sup>3</sup>) for the transfer of ions is  
9 the definite integral of the voltage and current with respect to time  $t$ , as follows:

$$10 \quad SEC_{ED} = \int_{t_0}^t U I dt \quad (3)$$

11 In fact, ED was carried out at constant voltage in this work. Based on the experimental data of  
12 the total voltage and current recorded at time  $t$ , the specific energy consumption of the stack  
13 can then be calculated using equation 4:

$$14 \quad SEC_{ED} = U \int_{t_0}^t I dt \quad (4)$$

## 15 *2.7 Optimization of the ED – NF coupled process with the Box–Behnken experimental* 16 *design*

17 It has been pointed out previously that the performances of these two processes are  
18 interconnected. The extent to which the first stage removes salts, will inevitably influence the  
19 efficiency of the second stage and the cost of the entire process. Therefore, a compromise  
20 must be found between these two processes. At which desalination rate should ED be carried  
21 out in order to provide a sufficient pesticide removal in NF step and sufficient overall  
22 desalination rate to satisfy the VN guideline at a reasonable cost? To answer this question, a  
23 specific Response Surface Methodology (RSM) was applied: the Box Behnken Design (BBD)

1 (Myers and Montgomery, 2002). Using this methodology, the process can be described (by  
2 modeling) taking into account the interaction between the parameters. Moreover, a precise  
3 optimization can be achieved using the developed mathematical model considering both the  
4 efficiency and the cost of treatment. Box and Behnken have developed a family of efficient  
5 three-level designs for fitting second-order response surface methodologies (Myers and  
6 Montgomery, 2002). The methodology of design is interesting and quite creative. The class of  
7 design is based on the construction of the balanced incomplete block designs. In the BBD,  
8 each pair of factors is linked in a  $2^2$  factorial (scaling  $\pm 1$ ) while the other ones remain fixed at  
9 the center of the experimental region investigated. Five experiments in the center of the  
10 domain are also required in order to determine the experimental error (pure error) which could  
11 be compared with the lack of fit, the error attributed to the inadequacy of the developed  
12 models. The number of assays ( $N_a$ ) required can be calculated using equation 5:

$$13 \quad N_a = (2^2 \times n \times (n - 1)/2) + 5 \quad (5)$$

14 where  $n$  is the number of variables. It has to be noted that the number of experiments is at the  
15 “power” of the number of parameters.

16 In this study, only the main parameters affecting ED and NF were considered such as applied  
17 voltage, product volume and treatment time for the ED stage and applied pressure, feed  
18 concentration and operating time for the NF stage.

19 However, the ED and NF processes are linked since the NF feed solution corresponds to the  
20 ED permeate. Then, a total of 5 parameters should be taken into account for the entire hybrid  
21 process, which would lead to a large number of experiments ( $N_a = 45$ ). Therefore, in order to  
22 limit the number of experiments, these two processes were study (modeling) independently,  
23 first the ED stage then the NF stage. The ED results were used to define the experimental  
24 region of the NF process. Once the mathematical models for each process were validated,

1 another Box Behnken matrix was developed coupling the two processes. In that case, the  
 2 responses of this matrix were not experimentally recorded but rather extracted from the two  
 3 previously validated models. In addition to reduce the number of experiments, such strategy is  
 4 a step by step method allowing adjustment in case of unsuitable results (out of the scope of  
 5 this study).

6 The experimental region investigated for both ED and NF processes and the coded values are  
 7 shown in Table 2. The experimental data were analyzed using Design-Expert 8 software  
 8 including ANOVA in order to obtain the interactions between the process variables and to  
 9 evaluate the accuracy/correctness of the mathematical model. As mentioned above, three  
 10 input parameters, including voltage ( $X_1$ ), permeate volume ( $X_2$ ) and treatment time ( $X_3$ ), were  
 11 taken into account in the case of ED for the modeling. Water recovery ( $Y_1$ ), TDS  
 12 concentration of the diluted compartment ( $Y_2$ ) and  $SEC_{ED}$  ( $Y_3$ ) were recorded as responses. For  
 13 the NF stage, the input parameters were applied pressure ( $X_4$ ), TDS concentration ( $X_5$ ) and  
 14 treatment time ( $X_6$ ). Similarly, water recovery ( $Y_4$ ), permeate TDS concentration ( $Y_5$ ) and  
 15  $SEC_{NF}$  ( $Y_6$ ) were recorded as responses with the addition of pesticide removal ( $Y_7$ ).

16

17 **Table 2**

18 Box Behnken Matrix: Experimental range and levels of independent variables for ED and NF  
 19 processes expressed in coded ( $X_i$ ) and real values ( $U_i$ )

	Coded variables ( $X_i$ )	Factor ( $U_i$ )	Experimental field		$U_{i,0}$	$\Delta U_i$
			Minimum value (-1)	Maximum value (+1)		
<b>ED</b>	$X_1$	$U_1$ : Applied Voltage (V)	6	10	8	2
	$X_2$	$U_2$ : Permeate volume (L)	0.8	2.4	1.6	0.8

	$X_3$	$U_3$ : Treatment time (min)	20	40	30	10
	$X_4$	$U_4$ : Applied pressure (bar)	6.0	12.0	9	3.0
$\frac{F}{Z}$	$X_5$	$U_5$ : TDS (ppm)	600	4200	2400	1800
	$X_6$	$U_6$ : Treatment time (h)	3	6	4.5	1.5

1

## 2 2.8 Calculation of the response for the BBD

### 3 2.8.1 Water recovery

4 For the ED stage, the water recovery ( $Y_1$ ) was calculated by the ratio between the ED  
5 permeate volume ( $X_2$ , in L) and the total volume of the synthetic solution used in the permeate  
6 ( $X_2$ ) and concentrated tanks ( $V_c$ , in L) as shown in Equation 6.

$$7 \quad Y_1 = \frac{X_2}{X_2 + V_c} \quad (6)$$

8 For the NF stage, the water recovery ( $Y_4$ ) was calculated based on the feed volume ( $V_f$ , equal  
9 to 5 L) and the permeate ( $V_p$ , in L) obtained after a batch experiment according to Equation 7:

$$10 \quad Y_4 = \frac{V_p}{V_f} \quad (7)$$

11 The total water recovery of the coupled ED - NF process is then equal to:

$$12 \quad Y_8 = Y_1 \times Y_4 \quad (8)$$

### 13 2.8.2 Energy consumption calculation

14 In the ED process, the energy consumption comes mainly from the electrical energy required  
15 by the stack (Equation 4). The  $SEC_{ED}$  ( $Y_3$ ) is therefore inversely proportional to the volume of  
16 permeate produced ( $X_2$ , in L):

$$17 \quad Y_3 = \frac{U}{X_2} \int_0^{X_3} I dt \quad (9)$$

1 where the definite integral of current with respect to time from the beginning of experiment ( $t_0$   
2 = 0) to the treatment time as mentioned in Table 2 ( $t = X_3$ , in min).

3 In the NF process, the specific energy consumption ( $Y_6$ ) was calculated according to Equation  
4 2. Thus, the overall specific energy consumption of the integrated process ( $Y_{10}$ ) is equal to the  
5 sum of specific energy consumption of the two stages:

$$6 \quad Y_{10} = Y_6 + Y_3 \quad (10)$$

### 1   **3   Results and discussion**

2

3   A feasibility study of an innovative process for treating surface water in the Mekong Delta  
4   containing both high salinity and pesticides has been previously conducted (Nguyen *et al.*,  
5   2019). Only one NF stage is not able to reject pesticides to the level necessary to meet the  
6   Vietnamese guideline for drinking water when the salinity is too high. For this reason, it has  
7   been proposed to couple NF with a pre-desalination stage by ED ensuring about 50% of salt  
8   removal. As a result, a permeate water complying with the Vietnamese guideline for drinking  
9   water was produced with a recovery in the range of 30-50% depending on the initial salinity.  
10   In addition, the specific energy consumption of the NF stage could be reduced due to the  
11   lower salinity of the input water. By contrast, the energy consumption of the ED stage is  
12   heavily dependent on the quantity of salt to be removed. Therefore, the crucial issue for the  
13   feasibility and perspective of ED-NF hybridization is the optimization of the obtained  
14   performance in terms of quality and recovery with respect to the consumed energy in each  
15   stage. In order to determine the best compromise, a response surface design was used.

#### 16   3.1   *Electrodialysis process modeling*

17   In this section, ED process is described using a BBD design. The data, including natural  
18   levels, design, and responses values, are shown in Table S1.

19   The experimental design consisted of 12 experiments, where each pair of factors is linked in a  
20   2<sup>2</sup> factorial (assays 1–12) plus five additional assays conducted at the center of the  
21   experimental region investigated (assays 13–17). Water recovery depends exclusively on the  
22   permeate volume and was varied from 50 to 75% (model not shown). Under these conditions,  
23   the experimental TDS concentration ( $Y_2$ ) in the ED permeate ranged from 322 to 4287 ppm,  
24   corresponding to a desalination efficiency varying from 94.6% to 28.6%. On the other hand,  
25   the corresponding calculated  $SEC_{ED}$  ( $Y_3$ ) ranged from about 3.87 to 0.60 kWh/m<sup>3</sup>.



1 The regression models for  $Y_2$  and  $Y_3$  can be expressed (in terms of coded variables) by the  
2 following second-order polynomial equations:

3

$$4 \quad Y_2 = 2552.6 - 656.7X_1 + 1166.6X_2 - 734.4X_3 - 163.9X_1X_3 + 387.4X_1^2 - 342.5X_2^2 \quad (11)$$

$$5 \quad Y_3 = 1.89 + 0.823X_1 - 0.774X_2 + 0.398X_3 - 0.316X_1X_2 + 0.145X_1X_3 - 0.133X_1^2 + \\ 6 \quad 0.168X_2^2 - 0.027X_3^2 \quad (12)$$

7

8 The coefficients of the polynomial model (quadratic model) were calculated using the Design-  
9 Expert® V11 program software. Their respective weights presented in Figure S1 (Appendix  
10 A) show that  $X_2$  (permeate volume) is the most prominent factors affecting ED desalination  
11 ( $Y_2$ ) followed by the treatment time ( $X_3$ ) and the applied voltage ( $X_1$ ). Concerning  $SEC_{ED}$  ( $Y_3$ ),  
12 the applied voltage ( $X_1$ ) is the most relevant parameter, which is logical because it is a square  
13 effect factor on this response (according to the Ohm's law, intensity is proportional to  
14 voltage). Obviously, the processing time ( $X_3$ ) is also a very important factor impacting the  
15 energy consumption as well as the permeate volume ( $X_2$ ). Considering the interactions  
16 between the different parameters, voltage and treatment time interact significantly with each  
17 other ( $X_1X_3$ ) on the desalination efficiency, since the amount of salt transported from the  
18 permeate compartment to the concentrate compartment is governed by the electrical charge  
19 which is simply the product of current intensity (consequence of the voltage) and time. The  
20 same interaction can be observed in the  $Y_3$  modelling (energy consumption) because the  
21 dissipated power is the product of the electrical charge and the voltage. There is also a strong  
22 interaction between voltage and permeate volume,  $X_1X_2$  on energy consumption. This can be  
23 explained by the fact that during the ED process, the overall resistivity of the system increases  
24 with the treatment time (due to the decrease in salinity of the permeate compartment) leading

1 to a decrease of the resulting intensity. The reduction in conductivity is related to both  
2 treatment time and permeate volume. The smaller the permeate volume, the larger the drop in  
3 intensity (lower overall electrical charge). This phenomenon is even more pronounced when  
4 the desalination rate is high, that is when the treatment time is longer. In other words, at  
5 constant voltage (potentiostatic mode), the lower the permeate TDS concentration, the lower  
6 the applied electrical charge and the slower the desalination rate. Under such operating  
7 conditions (constant voltage), the desalination rate is self-limited contrary to the case of the  
8 galvanostatic operating mode.

9 The analysis of variance (ANOVA) of regression parameters of the predicted response surface  
10 quadratic models for the two  $Y_2$  and  $Y_3$  outputs shows that both models have a high Fisher  
11 coefficient value (F value) and a low probability value ( $Pr > F < 0.0001$ ) indicating that they  
12 are significant (Table 3). Correlation coefficient ( $R^2 = 0.9895$  for  $Y_2$  and  $R^2 = 0.9944$  for  $Y_3$ )  
13 indicate that only ~ 1 % of the total variation could not be explained by the empirical model.  
14 It can be noted that according to Joglekar and May (J Joglekar and May, 1987), a good model  
15 fit should have an  $R^2$  value of at least 0.80.

16

17

18

19

20

21

22

23

1

2 **Table 3**3 ANOVA for TDS concentration in ED permeate ( $Y_2$ ) and  $SEC_{ED}$  ( $Y_3$ )

Source	Analysis of Variance (ANOVA)				
	df	Sum of Square	Mean of Square	F value	Pr>F
ANOVA results of $Y_2$ <b><math>R^2 = 0.9895</math> ; adjusted <math>R^2 = 0.9832</math> ; predicted <math>R^2 = 0.9756</math></b>					
Model	6	1.983E+07	3.305E+06	157.44	< 0.0001
Residual	10	2.099E+05	20990.51		
Lack of Fit	6	69163.48	11527.25	0.3276	0.8923
Pure error	4	1.407E+05	35185.40		
ANOVA results of $Y_3$ <b><math>R^2 = 0.9944</math> ; adjusted <math>R^2 = 0.9901</math> ; predicted <math>R^2 = 0.9701</math></b>					
Model	8	12.14	1.52	187.66	< 0.0001
Residual	8	0.0647	0.0081		
Lack of Fit	4	0.0487	0.0122	3.04	0.1532
Pure error	4	0.0160	0.0040		


4

5

6 Figure 1 and Figure 2 show the 3D contour plot for  $Y_2$  and  $Y_3$  respectively with the  
7 corresponding correlation between actual values versus predicted values. For both responses,  
8 the experimental (actual) values fit very well with the predicted values, which demonstrates a  
9 very good adequacy of the models. From the 3D contour plot of  $Y_2$ , it can be observed that the  
10 effect of the treatment time is accentuated at high voltage and vice versa ( $X_1X_3$  interaction).  
11 Likewise, the strong interaction between the applied voltage and the permeate volume ( $X_1X_2$ )  
12 can be easily observed in the 3D contour plot of  $Y_3$  (Figure 2).

1 **Figure 1**

2 a) 3D plot of TDS permeate concentration ( $Y_2$ ) as a function of ED treatment time ( $X_3$ ) and  
3 voltage ( $X_1$ ). b) Correlation between predicted values vs actual values.

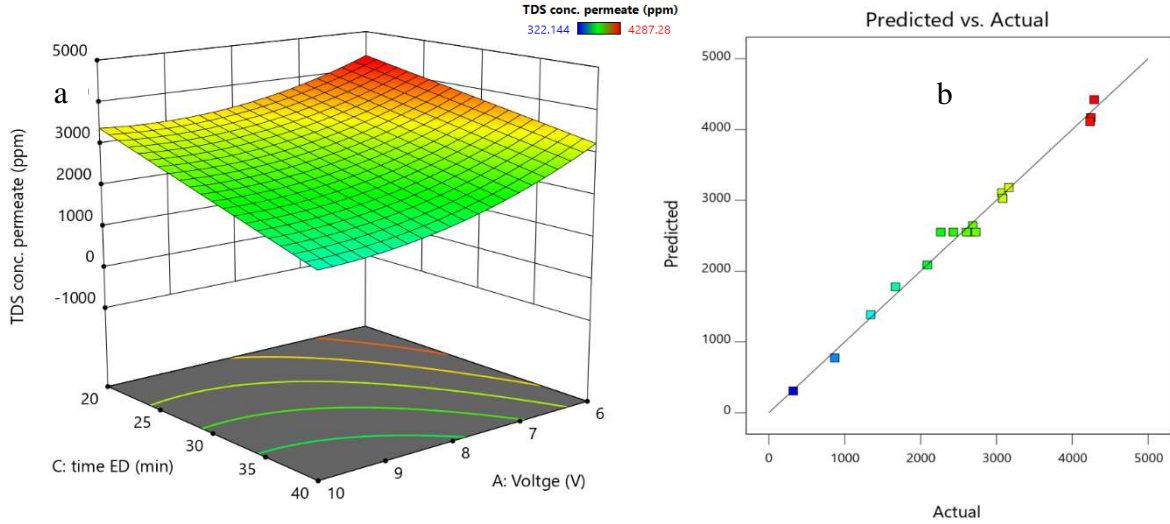


4

5

6 **Figure 2**

7 a) 3D plot of  $SEC_{ED}$  ( $Y_3$ ) as a function of ED permeate volume ( $X_3$ ) and voltage ( $X_1$ ). b)  
8 Correlation between predicted values vs actual values.

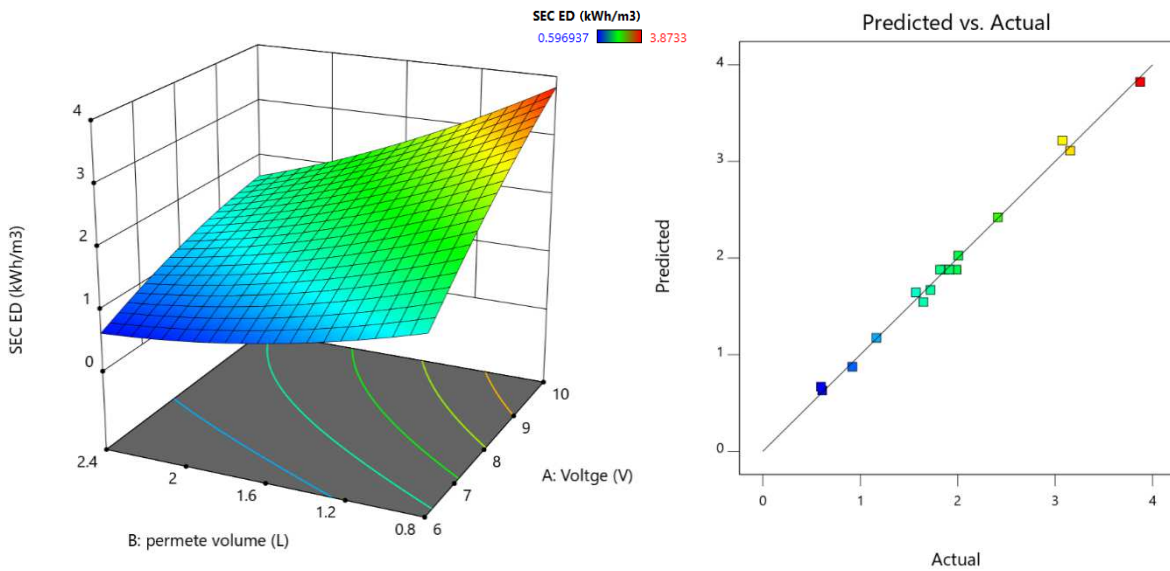

9

10

11

### 1 3.2 Nanofiltration process modeling

2 The NF stage was described using the same BBD approach. The applied pressure ( $X_4$ ), the  
3 TDS concentration in the ED permeate ( $X_5$ ) and the treatment time ( $X_6$ ) were considered as  
4 the main parameters of this study. Similarly, the water recovery ( $Y_4$ ), the TDS concentration  
5 in the NF permeate ( $Y_5$ ) and the  $SEC_{NF}$  ( $Y_6$ ) were recorded as responses with in addition the  
6 pesticide removal ( $Y_7$ ). The data, including natural levels, design, and responses values for the  
7 NF process, are shown in Table S2. Based on the experimental input matrix, the water  
8 recovery ( $Y_4$ ) varies from 26.6 to 86.1% (mean at 63.5%), the TDS concentration ( $Y_5$ ) which  
9 is the result of the two processes (ED + NF) varies from 22.3 to 541.3 ppm (mean at 155.9  
10 ppm), and  $SEC_{NF}$  ( $Y_6$ ) from 0.304 to 0.912 kWh.m<sup>-3</sup> (mean at 0.156 kWh.m<sup>-3</sup>). Regarding the  
11 pesticide removal ( $Y_7$ ), it was calculated from the mean of the three pesticides (fenobucarb,  
12 isoprothiolane and pretilachlor). Whatever the experimental condition, the concentration of  
13 isoprothiolane is below the detection limit corresponding to a rejection of more than 99.5%.  
14 Fenobucarb and pretilachlor follow the same trend with a retention ranging from 89 to 99.9%.  
15 The regression models for  $Y_4$ ,  $Y_5$ ,  $Y_6$  and  $Y_7$  can then be expressed (in terms of coded  
16 variables) by the following equations:

17

$$18 Y_4 = 68.78 + 15.01X_4 - 13.91X_5 + 10.21X_6 + 8.59X_4X_5 - 6.18X_4^2 - 5.16X_6^2 \quad (13)$$

$$19 Y_5 = 221.88 - 15.94X_4 + 212.5X_5 + 18.49X_6 + 18.95X_5X_6 - 36.85X_4^2 + 39.35X_5^2 \quad (14)$$

$$20 Y_6 = 0.452 + 0.01X_4 + 0.144X_5 - 0.113X_6 - 0.106X_4X_5 + 0.047X_4X_6 - 0.081X_5X_6 + \\ 21 0.045X_4^2 + 0.048X_5^2 + 0.057X_6^2 \quad (15)$$

$$22 Y_7 = 98.03 - 0.221X_4 - 2.74X_5 - 0.126X_6 - 1.15X_5^2 \quad (16)$$

23

1 The model was developed with Design Expert software V11 and adjusted by removing  
2 insignificant terms. The respective weights of coefficients are shown in Figure S2 (Appendix  
3 A). Table 4 shows the analysis of variance (ANOVA) of the regression parameters of the  
4 predicted quadratic response surface models for the NF stage : water recovery ( $Y_4$ ), TDS  
5 permeate concentration ( $Y_5$ ),  $SEC_{NF}$  ( $Y_6$ ) and pesticide removal ( $Y_7$ ). All four model equations  
6 are significant with negligible lack of fit. The regression coefficients  $R^2$  are above 97%  
7 (except for  $Y_7$ ) with a quite closed value of adjusted  $R^2$  and predicted  $R^2$ . The model equation  
8 for  $Y_7$  is not as accurate as the other models ( $R^2 = 0.864$ ) but remains valid and significant (J  
9 Joglekar and May, 1987). This observation can be easily explained. In fact, the small lack of  
10 adjustment was attributed to the narrow range of the obtained experimental values  
11 (approaching the analytical error) and also because only one parameter, the TDS  
12 concentration, significantly impacts the pesticide rejection. Indeed, TDS concentration has a  
13 very strong impact on pesticide removal and affects the responses ( $Y_7$ ) with a contribution  
14 over 99%, which is in agreement with the previous observation (Nguyen *et al.*, 2019).  
15 Concerning water recovery ( $Y_4$ ), the most influential factor is the pressure applied ( $X_4$ ),  
16 closely followed by the salinity of the NF feed solution ( $X_5$ ). These two parameters have  
17 antagonist influence on the water flow rate because they are related to the effective driving  
18 force and thus strongly affect the water recovery (for a given treatment time) (equation 7).  
19 Hence, these two parameters are interrelated, which can be observed by the strong interaction  
20  $X_1X_2$  in the  $Y_4$  model.

21

22

1 **Table 4**

2 ANOVA for NF water recovery ( $Y_4$ ), TDS permeate concentration ( $Y_5$ ), energy consumption  
 3 ( $Y_6$ ) and pesticide removal ( $Y_7$ ).

Source	Analysis of Variance (ANOVA)				
	df	Sum of Square	Mean of Square	F value	Pr>F
ANOVA results of $Y_4$		<b><math>R^2 = 0.9774</math> ; adjusted <math>R^2 = 0.9638</math> ; predicted <math>R^2 = 0.925</math></b>			
Model	6	4769.21	794.87	71.95	< 0.0001
Residual	10	110.47	11.05		
Lack of Fit	6	79.28	13.21	1.69	0.3173
Pure error	4	31.19	7.80		
ANOVA results of $Y_5$		<b><math>R^2 = 0.9744</math> ; adjusted <math>R^2 = 0.9590</math> ; predicted <math>R^2 = 0.9000</math></b>			
Model	6	3.791E+05	63183.66	63.36	< 0.0001
Residual	10	9972.79	997.28		
Lack of Fit	6	5281.44	880.24	0.7505	0.6419
Pure error	4	4691.34	1172.84		
ANOVA results of $Y_6$		<b><math>R^2 = 0.9914</math> ; adjusted <math>R^2 = 0.9804</math> ; predicted <math>R^2 = 0.9157</math></b>			
Model	9	0.3857	0.0429	90.12	< 0.0001
Residual	7	0.0033	0.0005		
Lack of Fit	3	0.0019	0.0006	1.80	0.2867
Pure error	4	0.0014	0.0004		
ANOVA results of $Y_7$		<b><math>R^2 = 0.864</math> ; adjusted <math>R^2 = 0.8187</math> ; predicted <math>R^2 = 0.7302</math></b>			
Model	4	66.13	16.53	19.06	< 0.0001
Residual	12	10.41	0.8673		
Lack of Fit	8	6.64	0.8305	0.8826	0.5937
Pure error	4	3.76	0.9409		

1 In addition, because TDS retention varies only slightly with the NF operating conditions ( $X_4$   
2 and  $X_6$ ), the TDS concentration in the permeate is therefore mainly related to the feed  
3 concentration ( $X_5$ ) (the higher the feed concentration the higher the permeate concentration  
4 will be). Hence, this parameter has a huge impact on the response ( $Y_5$ ), which has the  
5 consequence of mitigating strongly, in the model, the effect of the two others parameters.  
6 Pressure ( $X_4$ ) has the effect of increasing both water flux (increase in driving force) and solute  
7 flux (increase of concentration polarization and concentration factor). However, the dilution  
8 effect due to an increased water flux is predominant leading to an increase in overall retention  
9 with rising pressure ( $X_4$  has a negative effect on  $Y_5$ ). Similarly, treatment time ( $X_6$ ) determines  
10 the concentration factor (water recovery) but also leads to an increase of the salinity gradient  
11 between the feed and the permeate side.

12 The salinity gradient decreases salt retention, so  $X_6$  has a positive effect on the response  $Y_5$ .  
13 Finally,  $SEC_{NF}$  is mainly influenced by both salinity ( $X_5$ ) and treatment time ( $X_6$ ). Salinity  
14 decreases the effective driving force (increase of osmotic pressure) leading to a water flux  
15 decline (at the identical pressure) and thus positively impacts the  $SEC_{NF}$  value. In another  
16 respect, it was pointed out previously that the longer the treatment time, the higher the water  
17 recovery and consequently the lower the  $SEC_{NF}$ . Moreover, as pressure and initial salt  
18 concentration determine the effective driving force, it is normal to observe a strong interaction  
19 between these 2 parameters.

20



### 1 3.3 Coupling the ED and NF process: optimization

2 The objective of this section is to describe using modeling the entire hybrid system combining  
3 ED and NF in order to optimize the process in term of efficiency (salt and pesticide removal)  
4 and energy cost. Based on the models developed in the previous section for both ED and NF,  
5 another experimental matrix was realized coupling the two stages. As mentioned above, the  
6 experimental data of this matrix are deduced from the previously developed models for each  
7 stage, considering for each experiment that the ED permeate is subsequently treated by NF.  
8 The same parameters and ranges were taken into account except for the NF feed concentration  
9 which is the results (outlet) of the ED stage. The ED-NF Box Behnken matrix including  
10 experimental condition and results is provided in Appendix A (Table S3).

11 Additional responses were included, such as the overall water recovery ( $Y_8$ ), TDS removal  
12 ( $Y_9$ ) and specific energy consumption ( $Y_{10}$ ).  $Y_8$  and  $Y_9$  are the product of the water recovery  
13 (Equation 8) and TDS removal of each stage respectively whereas the total specific energy  
14 consumption ( $Y_{10}$ ) is the sum of  $SEC_{ED}$  and  $SEC_{NF}$  (Equation 10). In addition, since sodium  
15 and chloride are the majority ions (due to sea water intrusion), their concentrations could  
16 exceed the Vietnamese regulations and should be considered as responses for the optimization  
17 ( $Y_{11}$  and  $Y_{12}$  for chloride and sodium respectively).

18

$$\begin{aligned} 19 \quad Y_8 = & 45.06 + 3.33X_1 + 2.698X_2 + 3.733X_3 + 10.56X_5 + 6.938X_6 + 0.834X_1X_3 - \\ 20 \quad & 2.101X_1X_5 + 5.244X_2X_5 + 2.425X_2X_6 - 2.351X_3X_5 - 0.80X_3X_6 - 1.501X_5X_6 - \\ 21 \quad & 1.993X_1^2 - 2.138X_2^2 - 4.0.71X_5^2 - 3.412X_6^2 \end{aligned} \quad (17)$$

22

$$\begin{aligned}
& Y_9 = 95.762 + 1.484X_1 - 2.386X_2 + 1.568X_3 + 0.28X_5 - 0.359X_6 + 0.327X_1X_2 + \\
& 0.177X_1X_3 + 0.119X_1X_5 + 0.367X_2X_3 - 0.219X_2X_5 + 0.137X_3X_6 - 0.949X_1^2 + \\
& 0.433X_2^2 - 0.122X_3^2 + 0.647X_5^2 - 0.0077X_6^2 \quad (18)
\end{aligned}$$

$$\begin{aligned}
& Y_{10} = 2.35 + 0.763X_1 - 0.683X_2 + 0.336X_3 + 0.0003X_5 - 0.12X_6 - 0.338X_1X_2 + \\
& 0.143X_1X_3 + 0.039X_1X_5 - 0.0295X_1X_6 - 0.0253X_2X_3 - 0.0688X_2X_5 + 0.0525X_2X_6 + \\
& 0.0435X_3X_5 + 0.033X_3X_6 + 0.0473X_5X_6 - 0.096X_1^2 + 0.156X_2^2 + 0.044X_5^2 + 0.055X_6^2 \\
& \quad (19)
\end{aligned}$$

$$\begin{aligned}
& Y_{11} = 138.9 - 45.02X_1 + 78.76X_2 - 49.11X_3 - 10.99X_5 + 10.93X_6 + 2.075X_1X_2 - \\
& 11X_1X_3 - 3.25X_2X_3 + 25.75X_1^2 - 22.75X_2^2 + 1.12X_3^2 \quad (20)
\end{aligned}$$

$$\begin{aligned}
& Y_{12} = 86.69 - 27.44X_1 + 48.42X_2 - 30.36X_3 - 8.21X_5 + 6.956X_6 - 6.825X_1X_3 - \\
& 1.925X_2X_3 + 15.99X_1^2 - 13.94X_2^2 \quad (21)
\end{aligned}$$

Because these models were developed based on the results predicted from the previous validated models (for each process independently), they can be considered significant. The respective values of coefficients in Equations 17-21 presented in Figure S3 (Appendix A) show that the treatment time ( $X_6$ ) and feed TDS ( $X_5$ ) of the NF stage are predominant factors for water recovery ( $Y_8$ ) while the applied voltage ( $X_1$ ), permeate volume ( $X_2$ ) and treatment time ( $X_3$ ) of the ED stage are the predominant factors for total TDS removal ( $Y_8$ ), and residual chloride ( $Y_{11}$ ) and sodium ( $Y_{12}$ ) ions in the purified water. As expected,  $SEC_{ED}$  ( $Y_3$ ) dominates

1 the hybrid ED/NF system SEC ( $Y_{10}$ ). In addition, since the two processes are interrelated,  
2 interactions between the parameters of the two processes can also be observed especially in  
3 the case of  $Y_8$  where cross coefficients between  $X_2$  and  $X_3$  of the ED stage and  $X_5$  and  $X_6$  have  
4 a significant influence. The optimization of the overall hybrid process was carried out by  
5 applying specific criteria in order to comply the Vietnamese regulations (QCVN 01-  
6 1:2018/BYT, 2018) regarding the concentration of pesticides, sodium and chloride while  
7 minimizing the operating cost (energy consumption and membrane surface area) and the  
8 investment cost (ED cells and NF membrane modules).

9 The criteria selected for the optimization of the entire hybrid system are the following:

- 10 (1) The TDS removal should be maximized (importance 3/5)
- 11 (2) The overall water recovery should be maximized (importance 3/5)
- 12 (3) The overall SEC should be minimized (importance 3/5)
- 13 (4) Chloride and sodium concentrations ( $Y_{11}$  and  $Y_{12}$ ) have to be in the range of 50 to 250  
14 ppm.

15 Moreover, in a more forward-looking perspective of system scaling up, it is necessary to take  
16 into account in addition to the energy consumption, the investment and operating costs related  
17 to the number of ED cells and the membrane surface area for each process (ED and NF). This  
18 dimensioning aspect is directly related to the hydraulic retention time (HRT) which is, in this  
19 case, dependent on the treatment time of each process. As a consequence, a fifth criterion was  
20 chosen corresponding to the system dimensioning:

- 21 (5) Minimization of the processing time for both ED and NF (importance 1/5).

22 It has to be noted that these criteria were selected in order to obtain a cost-effective hybrid  
23 process but it could be modified to adjust the configuration and the operating conditions more  
24 precisely according to the local constraints such as footprint, energy cost, membrane

1 availability.... Based on the five criteria defined above, the Design Expert V11 software  
2 proposed the best solution (Table 5) in terms of desirability (best compromise to satisfy the  
3 applied criteria) with a value close to 80%.

4 The experiments carried out under the optimal conditions deduced from the modeling gave  
5 experimental results in good agreement with the predictions allowing to validate this  
6 optimization approach. It can be seen that the desalination rate is higher than expected in the  
7 ED stage, implying an overconsumption of energy, and that the conversion rate is lower in the  
8 NF stage, probably due to the uncertainty of the pressure measurement related to the gauge  
9 used ( $\pm 0.1$  bar). In addition, the multivariable-linear analysis used for this non-linear system  
10 can lead to small deviations between the predicted and experimental values, as mentioned  
11 above.

12 Nevertheless, the observed deviations are acceptable with values of about 8% and 10% on  
13 overall productivity (Y8) and specific energy consumption (Y10), respectively. Correlatively,  
14 water was produced with a better quality due to higher rejection of salts and lower conversion  
15 rate during the ED and the NF stages, respectively.

16

1 **Table 5**

2 Predicted and experimental responses obtained from the optimal conditions deduced from the  
 3 modeling.

Optimal parameters	ED			NF			
	$X_1$	$X_2$	$X_3$	$X_4$		$X_5$	
	9 V	2.4 L	27.1 min	11.1 bar		4.38 h	
Responses	ED			NF			
	$Y_1$ ( $Y_{ED}$ )	$Y_2$ TDS <sub>ED</sub> permeate	$Y_3$ SEC <sub>ED</sub>	$Y_4$ ( $Y_{NF}$ )	$Y_5$ TDS removal	$Y_6$ SEC <sub>NF</sub>	$Y_7$ pesticide removal
	%	mg/L	kWh.m <sup>-3</sup>	%	%	kWh.m <sup>-3</sup>	%
	<b>Predicted</b>	75	3382	1.36	72	90.4	0.53
<b>Experimental</b>	75	3233	1.56	66	91.9	0.57	> 99
ED –NF hybrid system							
Responses	$Y_8$ ( $Y_{tot}$ )	$Y_9$ (total TDS removal)	$Y_{10}$ (total SEC)		$Y_{11}$ [Cl <sup>-</sup> ]	$Y_{12}$ [Na <sup>+</sup> ]	
	%	%	kWh.m <sup>-3</sup>		mg/L	mg/L	
	<b>Predicted</b>	54	94.5	1.89		186	114
<b>Experimental</b>	50	95.4	2.13		158	100	
<b>Desirability</b>	78.5%						

4

5 The evolution of conductivity during the ED stage and of conductivity and permeate flux  
 6 during the NF stage are presented in Appendix A (Figures S4 and S5). Table 6 summarizes  
 7 the experimental ionic composition of the feed and permeates at each stage of the hybrid  
 8 ED/NF system. Since monovalent ions constitute the majority ions in the feed, they dominate

1 the TDS rejection rate. The rejection of about 90% observed for monovalent ions by the NF90  
 2 membrane is in agreement with the values found in the literature (Kammoun *et al.*, 2020). The  
 3 near quantitative rejection of sulfate ions in the NF stage counterbalances the low removal of  
 4 these ions in the ED stage, demonstrating the complementarity of the two processes.

6 **Table 6**

7 Experimental ionic composition of the feed and permeates at each stage of the hybrid process.

	<b>Chloride</b>	<b>Sulfate</b>	<b>Sodium</b>	<b>Magnesium</b>	<b>Calcium</b>	<b>total TDS</b>	<b>TDS removal rate</b>
	mg/l	mg/l	mg/l	mg/l	mg/l	mg/l	%
<b>Feed</b>	3197	459	1721	258	59	5693	
<b>ED permeate</b>	1658	432	964	148	31	3233	
<b>ED removal (%)</b>	48	6	44	43	47	-	43.2
<b>NF permeate</b>	159	1.9	100	1.5	0.5	263	
<b>NF rejection (%)</b>	90	> 99	90	99	98	-	91,9
<b>Overall desalination rate</b>							<b>95.4</b>

8  
 9 The experimental validation showed that the desalination rate reached about 95% for the  
 10 overall hybrid system. Operating conditions achieved a salinity of less than 3.5 g/L after the  
 11 ED stage, which is low enough for the subsequent NF treatment to meet Vietnamese  
 12 guidelines for sodium and chloride concentration and to remove about 99% of total pesticides.

1 During the dry season in 2020, the saline intrusion, with a salinity rate of 4 g/L can move up  
2 to 50 – 130 km from the river mouth inside the delta (Loc *et al.*, 2021). More generally, it  
3 forms a wide strip of land whose salinity is between 1 and 10 g/L from January to April  
4 making the surface water undrinkable (Ly *et al.*, 2018; Whitehead *et al.*, 2019)]. In fact,  
5 salinity varies with peaks during the months of February and March depending on the tide  
6 amplitude and the river discharge (Tuan *et al.*, 2007). When the salinity is below about 3 g/L,  
7 a single stage with a tight NF membrane (like NF90) (Kammoun *et al.*, 2020) is sufficient to  
8 obtain drinking water that meets the Vietnamese standards in terms of both desalination and  
9 pesticide removal. Beyond this value, ED/NF integration in a hybrid process becomes  
10 necessary.

11 However, as can be seen in Table 5, the ED desalination stage contributes predominantly to  
12 the energy consumption of the hybrid system in the case studied (TDS of about 5 g/L). This  
13 contribution strongly depends on the amount of salt to be removed in order for the NF stage to  
14 effectively remove pesticides: the greater this amount, the higher the energy consumption of  
15 ED. This hybrid process will therefore become prohibitively expensive if salinity is very high  
16 (in coastal areas for example) or if salinity peaks of high intensity occur and last for a long  
17 time.

18

## 19 **Conclusion**

20 The complexity of Mekong Delta surface waters due to the simultaneous presence of high  
21 levels of pesticides and salinity requires the use of advanced treatment techniques such as  
22 membrane technologies to secure the water supply for the living population in the rural areas  
23 of the Delta. In this work, a hybrid process was developed combining ED as a preliminary  
24 treatment to reduce salinity and NF for the removal of pesticides and residual salinity. The

1 efficiency of pesticide removal by NF is highly dependent on the TDS concentration and thus  
2 on the performance of the preliminary ED stage. This study highlighted the following points:

- 3 • By using a specific surface response methodology, modeling of the entire hybrid  
4 system can be performed in terms of water quality (overall desalination and pesticide  
5 removal) and energy consumption.
- 6 • The experimental operating conditions resulting from the modeling confirmed the  
7 predicted performance of the coupled ED/NF system with water quality in  
8 compliance with Vietnamese regulations and a maximum deviation of about 8% and  
9 10% on the conversion rate and energy consumption, respectively.
- 10 • It should be noted that the models developed using the experimental design  
11 methodology are only relevant to the experimental domain explored.
- 12 • Future works may consist of verifying the optimized conditions of the ED/NF  
13 process by applying it to real surface waters of the Mekong Delta. On the other hand,  
14 the integration of photovoltaic solar panels could make it possible to obtain an eco-  
15 friendly and autonomous system operating at low energy costs.

16 Such a treatment strategy could be a safe and reliable solution to provide drinking water  
17 during the dry season for remote population living in the Mekong Delta. This could also  
18 benefit many other agricultural and coastal area regions in the world where dry and rainy  
19 season become more and more pronounced due to climate change, resulting in severe drought  
20 and seawater intrusion.

21

22

23

24



## 1 **Declaration of competing interest**

2 The authors declare that they have no known competing financial interest or personal  
3 relationship that could have appeared to influence the work reported in this paper.

4

## 5 **Acknowledgment**

6 The authors are grateful for the financial support of this work provided in part by the  
7 Vietnamese government (VIED-Vietnam International Education Development-Project 911)  
8 by the University of Science and Technology of Hanoi (USTH) and Campus France (Linh  
9 Duy Nguyen's grant).

10

## 11 **References**

12 Al-Karaghoul, A., Kazmerski, L.L., 2013. Energy consumption and water production cost of  
13 conventional and renewable-energy-powered desalination processes. *Renew. Sustain.*  
14 *Energy Rev.* 24, 343–356. <https://doi.org/10.1016/j.rser.2012.12.064>

15 Carvalho, F.P., Villeneuve, J.P., Cattini, C., Tolosa, I., Thuan, D.D., Nhan, D.D., 2008.  
16 Agrochemical and polychlorobiphenyl (PCB) residues in the Mekong River delta,  
17 Vietnam. *Mar. Pollut. Bull.* 56, 1476–85.  
18 <https://doi.org/10.1016/j.marpolbul.2008.04.042>

19 Chau, N.D.G., Sebesvari, Z., Amelung, W., Renaud, F.G., 2015. Pesticide pollution of  
20 multiple drinking water sources in the Mekong Delta, Vietnam: evidence from two  
21 provinces. *Env. Sci. Pollut. Res.* 22, 9042–9058. [https://doi.org/10.1007/s11356-014-](https://doi.org/10.1007/s11356-014-4034-x)  
22 [4034-x](https://doi.org/10.1007/s11356-014-4034-x)

23 Grady, C.A., Nguyen, K. Van, Nguyen, T. Van, Blatchley, E.R., 2018. Who is being left

1 behind? An analysis of improved drinking water and basic sanitation access in the  
2 Vietnamese Mekong Delta. *J. Water, Sanit. Hyg. Dev.* 8, 508–519.  
3 <https://doi.org/10.2166/washdev.2018.005>

4 J Joglekar, A.M., May, A.T., 1987. Product excellence through design of experiments. *Cereal*  
5 *Food World* 32, 857–868.

6 Kammoun, M.A., Gassara, S., Palmeri, J., Amar, R. Ben, Deratani, A., 2020. Nanofiltration  
7 performance prediction for brackish water desalination: Case study of Tunisian  
8 groundwater. *Desalin. Water Treat.* 181, 27–39. <https://doi.org/10.5004/dwt.2020.25100>

9 Košutić, K., Furač, L., Sipos, L., Kunst, B., 2005. Removal of arsenic and pesticides from  
10 drinking water by nanofiltration membranes. *Sep. Purif. Technol.* 42, 137–144.  
11 <https://doi.org/10.1016/j.seppur.2004.07.003>

12 Loc, H.H., Van Binh, D., Park, E., Shrestha, S., Dung, T.D., Son, V.H., Truc, N.H.T., Mai,  
13 N.P., Seijger, C., 2021. Intensifying saline water intrusion and drought in the Mekong  
14 Delta: From physical evidence to policy outlooks. *Sci. Total Environ.* 757, 143919.  
15 <https://doi.org/10.1016/j.scitotenv.2020.143919>

16 Ly, N.H.T., Giao, N.T., 2018. Surface water quality in canals in An Giang province, Viet  
17 Nam, from 2009 to 2016. *J. Vietnamese Environ.* 10, 113–119.  
18 <https://doi.org/10.13141/jve.vol10.no2.pp113-119>

19 Mäkelä, M., 2017. Experimental design and response surface methodology in energy  
20 applications: A tutorial review. *Energy Convers. Manag.* 151, 630–640.  
21 <https://doi.org/https://doi.org/10.1016/j.enconman.2017.09.021>

22 Minh, H.V.T., Kurasaki, M., Van Ty, T., Tran, D.Q., Le, K.N., Avtar, R., Rahman, M.M.,  
23 Osaki, M., 2019. Effects of multi-dike protection systems on surface water quality in the  
24 Vietnamese Mekong Delta. *Water (Switzerland)* 11. <https://doi.org/10.3390/w11051010>

- 1 Miralles-Cuevas, S., Oller, I., Sánchez Pérez, J.A., Malato, S., 2014. Removal of  
2 pharmaceuticals from MWTP effluent by nanofiltration and solar photo-Fenton using  
3 two different iron complexes at neutral pH. *Water Res.* 64, 23–31.  
4 <https://doi.org/10.1016/j.watres.2014.06.032>
- 5 Myers, R.H., Montgomery, D.C., 2002. *Response Surface Methodology: Product and Process*  
6 *Optimization Using Designed Experiments*, 2nd ed, John Wiley & Sons. New York.
- 7 Nghiem, L.D., Schäfer, a I., Elimelech, M., 2004. Removal of natural hormones by  
8 nanofiltration membranes: Measurements, modeling, and mechanisms. *Environ. Sci.*  
9 *Technol.* 38, 1888–1896. <https://doi.org/10.1021/es034952r>
- 10 Nguyen, D.L., Gassara, S., Bui, Q.M., Zaviska, F., Sistat, P., Deratani, A., 2019. Desalination  
11 and removal of pesticides from surface water in Mekong Delta by coupling nanofiltration  
12 and electro dialysis. *Environ. Sci. Pollut. Res.* 26, 32687–32697.  
13 <https://doi.org/10.1007/s11356-018-3918-6>.
- 14 Nguyen, D.L., Bui, M.Q., Sistat, P., Deratani, A., 2020. Current status of surface water in the  
15 Mekong Delta, Vietnam: Threats for drinking water supply and treatment technologies,  
16 in: Marseau, S. (Ed.), *The Mekong: History, Geology and Environmental Issues*. Nova  
17 Science Publishers Inc., New York, pp. 41–76.
- 18 Nikbakht Fini, M., Madsen, H.T., Muff, J., 2019. The effect of water matrix, feed  
19 concentration and recovery on the rejection of pesticides using NF/RO membranes in  
20 water treatment. *Sep. Purif. Technol.* 215, 521–527.  
21 <https://doi.org/https://doi.org/10.1016/j.seppur.2019.01.047>
- 22 Ormad, M.P., Miguel, N., Claver, A., Matesanz, J.M., Ovelleiro, J.L., 2008. Pesticides  
23 removal in the process of drinking water production. *Chemosphere* 71, 97–106.  
24 <https://doi.org/10.1016/j.chemosphere.2007.10.006>

1 QCVN 01-1:2018/BYT. Circular enforced on ‘National technical regulation on Domestic  
2 Water Quality.’” Ministry of Health, p. 4, 2018.

3 Park, M., Snyder, S.A., 2020. Chapter 6 - Attenuation of contaminants of emerging concerns  
4 by nanofiltration membrane: rejection mechanism and application in water reuse, in:  
5 Hernández-Maldonado, A.J., Blaney, L. (Eds.), *Contaminants of Emerging Concern in*  
6 *Water and Wastewater*. Butterworth-Heinemann, pp. 177–206.  
7 <https://doi.org/https://doi.org/10.1016/B978-0-12-813561-7.00006-7>

8 Patel, S.K., Qin, M., Walker, W.S., Elimelech, M., 2020. Energy Efficiency of Electro-Driven  
9 Brackish Water Desalination: Electrodialysis Significantly Outperforms Membrane  
10 Capacitive Deionization. *Environ. Sci. Technol.* 54, 3663–3677.  
11 <https://doi.org/10.1021/acs.est.9b07482>

12 Pham, V.T., Sebesvari, Z., Bläsing, M., Rosendahl, I., Renaud, F.G., 2013. Pesticide  
13 management and their residues in sediments and surface and drinking water in the  
14 Mekong Delta, Vietnam. *Sci. Total Environ.* 452–453, 28–39.  
15 <https://doi.org/10.1016/j.scitotenv.2013.02.026>

16 Plakas, K.V., Karabelas, A.J., 2008. Membrane retention of herbicides from single and multi-  
17 solute media: The effect of ionic environment. *J. Memb. Sci.* 320, 325–334.  
18 <https://doi.org/10.1016/j.memsci.2008.04.016>

19 Qiu, Y.-W., Zhang, G., Liu, G.-Q., Guo, L.-L., Li, X.-D., Wai, O., 2009. Polycyclic aromatic  
20 hydrocarbons (PAHs) in the water column and sediment core of Deep Bay, South China.  
21 *Estuar. Coast. Shelf Sci.* 83, 60–66. <https://doi.org/10.1016/j.ecss.2009.03.018>

22 Ren, T., Han, L., Liu, R., Ma, C., Chen, X., Zhao, S., Zhang, Y., 2017. Influence of inorganic  
23 salt on retention of ibuprofen by nanofiltration. *Sep. Purif. Technol.* 189, 382–388.  
24 <https://doi.org/https://doi.org/10.1016/j.seppur.2017.08.035>

- 1 Renaud, F.G., Kuenzer, C., 2012. The Mekong Delta System, Springer. Springer.  
2 <https://doi.org/10.1073/pnas.0703993104>
- 3 Sarkar, B., Venkateshwarlu, N., Nageswara Rao, R., Bhattacharjee, C., Kale, V., 2007.  
4 Potable water production from pesticide contaminated surface water—A membrane  
5 based approach. *Desalination* 204, 368–373. <https://doi.org/10.1016/j.desal.2006.02.041>
- 6 Teixeira, M.R., Rosa, M.J., Nyström, M., 2005. The role of membrane charge on  
7 nanofiltration performance. *J. Memb. Sci.* <https://doi.org/10.1016/j.memsci.2005.04.046>
- 8 Thanuttamavong, M., Yamamoto, K., Ik Oh, J., Ho Choo, K., June Choi, S., 2002. Rejection  
9 characteristics of organic and inorganic pollutants by ultra low-pressure nanofiltration of  
10 surface water for drinking water treatment. *Desalination* 145, 257–264.  
11 [https://doi.org/10.1016/S0011-9164\(02\)00420-4](https://doi.org/10.1016/S0011-9164(02)00420-4)
- 12 Tuan, L.A., Hoanh, C.T., Miller, F., Sinh, B.T., 2007. Flood and salinity management in the  
13 Mekong Delta, Vietnam, in: Be, T.T., Sinh, B.T., Miller, F. (Eds.), *Challenges to*  
14 *Sustainable Development in the Mekong Delta: Regional and National Policy Issues and*  
15 *Research Needs: Literature Analysis*. Bangkok, Thailand, pp. 15–68.
- 16 Van der Bruggen, B., Everaert, K., Wilms, D., Vandecasteele, C., 2001. Application of  
17 nanofiltration for removal of pesticides, nitrate and hardness from ground water:  
18 rejection properties and economic evaluation. *J. Memb. Sci.* 193, 239–248.  
19 [https://doi.org/10.1016/S0376-7388\(01\)00517-8](https://doi.org/10.1016/S0376-7388(01)00517-8)
- 20 Vergili, I., 2013. Application of nanofiltration for the removal of carbamazepine, diclofenac  
21 and ibuprofen from drinking water sources. *J. Environ. Manage.* 127, 177–87.  
22 <https://doi.org/10.1016/j.jenvman.2013.04.036>
- 23 Wang, S., Li, L., Yu, S., Dong, B., Gao, N., Wang, X., 2021. A review of advances in EDCs  
24 and PhACs removal by nanofiltration: Mechanisms, impact factors and the influence of

1       organic       matter.       Chem.       Eng.       J.       406,       126722.  
2       <https://doi.org/https://doi.org/10.1016/j.cej.2020.126722>

3       Whitehead, P.G., Jin, L., Bussi, G., Voepel, H.E., Darby, S.E., Vasilopoulos, G., Manley, R.,  
4       Rodda, H., Hutton, C., Hackney, C., Tri, V.P.D., Hung, N.N., 2019. Water quality  
5       modelling of the Mekong River basin: Climate change and socioeconomics drive flow  
6       and nutrient flux changes to the Mekong Delta. *Sci. Total Environ.* 673, 218–229.  
7       <https://doi.org/10.1016/j.scitotenv.2019.03.315>

8       Zhang, Y., Causserand, C., Aimar, P., Cravedi, J., 2006. Removal of bisphenol A by a  
9       nanofiltration membrane in view of drinking water production. *Water Res.* 40, 3793–  
10       3799. <https://doi.org/10.1016/j.watres.2006.09.011>

11       Zhao, Y., Xing, W., Xu, N., Wong, F.-S., 2005. Effects of inorganic electrolytes on zeta  
12       potentials of ceramic microfiltration membranes. *Sep. Purif. Technol.* 42, 117–121.  
13       <https://doi.org/10.1016/j.seppur.2004.06.011>

14  
15  
16

## Graphical abstract

# Optimization of a hybrid process combining Nanofiltration and Electrodesalination for the treatment of surface water in the Mekong Delta region

Linh Duy Nguyen<sup>1,2</sup>, Mohamed Ayman Kamoun<sup>1</sup>, Minh Quang Bui<sup>2</sup>, Philippe Sizat<sup>1</sup>, André Deratani<sup>1</sup>, François Zavisca<sup>1</sup>

<sup>1</sup> Institut Européen des Membranes – IEM, UMR5635 ENSCM, CNRS, Univ Montpellier, Montpellier, France

<sup>2</sup> Institute of Environmental Technology, Vietnam Academy of Science and Technology (IET- VAST), Hanoi, Vietnam.

