



HAL
open science

Multipolar Terahertz Antennas

Alaeddine Abbes, Annick Pénarier, Philippe Nouvel, Luca Varani, Stéphane Blin

► **To cite this version:**

Alaeddine Abbes, Annick Pénarier, Philippe Nouvel, Luca Varani, Stéphane Blin. Multipolar Terahertz Antennas. French-German TeraHertz Conference, May 2022, La grande motte, France. hal-04283141

HAL Id: hal-04283141

<https://hal.umontpellier.fr/hal-04283141>

Submitted on 13 Nov 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Multipolar Terahertz Antennas

A. Abbes[@], A. Pénarier[@], P. Nouvel[@], L. Varani[@] and S. Blin[@]

[@]IES, Univ Montpellier, UMR CNRS 5214, Montpellier, 34090, France

Corresponding author: alaeddine.abbes@umontpellier.fr

The recent progress on THz communications accelerated by photonic technologies [1] leads to a possible integration of THz devices in the next-generation communication systems (6G). However, as photonic-based Continuous-Wave (CW) THz sources are concerned, the output power is limited [2] and the coherence (spatial, temporal and polarization) is not sufficient to ensure sufficient signal-to-noise at reception for successful high-data-rate communications. Among the possible coherent sources, we proposed the use of a Dual-Frequency Vertical-external-Cavity Surface-Emitting Laser (DF-VeCSEL) based on the coexistence of two transverse modes operating around 1064 nm [3]. We demonstrated coherent and tunable THz emission using two kinds of photomixers, either a commercial Uni-Travelling Carrier Photodiode (UTC-PD) [4] or a plasmonic-based photoconductive antenna (PCA) [5]. In this work, we propose a solution to improve the THz output power by taking advantage of the transverse structuration of the laser modes. The idea is to collect all the optical beating spots available in the transverse Laguerre-Gauss modes of the DF-VeCSEL. To this end, we designed MultiPolar Antennas (MPA) at 100 GHz as a proof-of-concept. Fig. 1 shows the design of 2 crossed dipoles on a high-resistivity Si-lens, showing that impedance matching can be achieved (left) and that a higher gain is obtained in comparison to standard dipole antennas (right). We will discuss the possible compromises in terms of impedance matching, gain and bandwidth of different kinds of multipolar antenna designs using 2 to 4 dipoles, for various possible excitation polarity patterns.

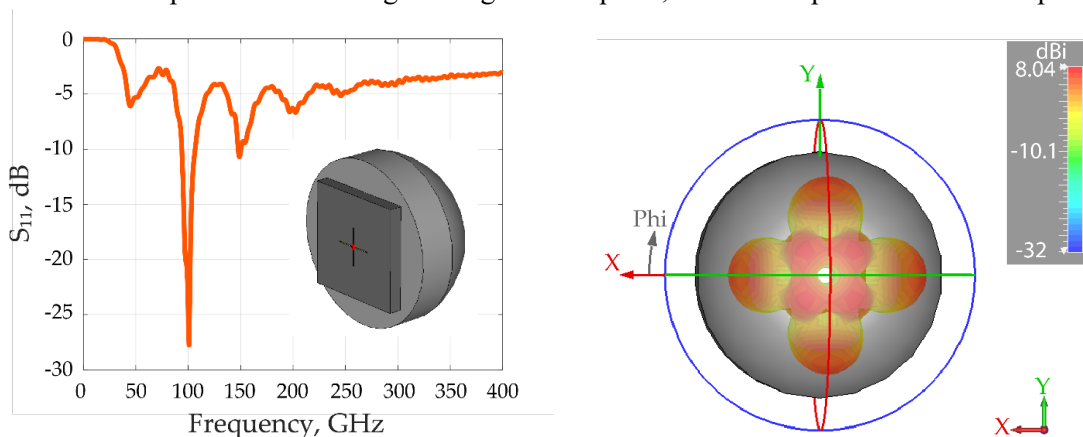


Figure 1: Multipolar antenna based on 2 crossed dipoles designed at 100 GHz.
Left) S_{11} parameter (Inset: view of the MPA). Right) Far-field pattern (max. realiz. gain of 8 dBi).

This work was supported by ANR (Spatiotera), I-SITE MUSE AAP2021 (STAE).

References:

- [1] T. Nagatsuma et al. Nat. Photon. **10**, 371-379 (2016)
- [2] S. Dhillon et al. J. Phys. D : Appl. Phys. **50**, 043001 (2017)
- [3] R. Paquet et al. Opt. Lett. **41**, 3751–3754 (2016)
- [4] S. Blin et al. IEEE J. Sel. Top. Quantum Electron., **23**, 1500511 (2017)
- [5] A. Abbes et al. IRMMW-THz (2021)
- [6] P. Meyer and D. S. Prinsloo, IEEE Trans. Ant. Prop., **63**, 4818–4826 (2015)