



**HAL**  
open science

## Multipolar Terahertz Antennas

A. Abbes, J. Guise, Annick Pénarier, P. Nouvel, A. Garnache, Luca Varani,  
Stéphane Blin

► **To cite this version:**

A. Abbes, J. Guise, Annick Pénarier, P. Nouvel, A. Garnache, et al.. Multipolar Terahertz Antennas. 2022 47th International Conference on Infrared, Millimeter and Terahertz Waves (IRMMW-THz), Aug 2022, Delft, Netherlands. pp.1-2, 10.1109/IRMMW-THz50927.2022.9895535 . hal-04283113

**HAL Id: hal-04283113**

**<https://hal.umontpellier.fr/hal-04283113>**

Submitted on 13 Nov 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Multipolar Terahertz Antennas

A. Abbes<sup>1</sup>, A. Pénarier<sup>1</sup>, P. Nouvel<sup>1</sup>, L. Varani<sup>1</sup>, and S. Blin<sup>1</sup>  
<sup>1</sup>IES, Univ Montpellier, UNR CNRS 5214, Montpellier, France


**Abstract**— Continuous-wave photonics-based THz sources present limited output power due to the restricted input optical power accepted by photomixers. Here, we investigate multipolar antenna design to increase the available THz output power by increasing the number of photomixers. Simulations of 4 to 8 dipole arms antennas are conducted, showing an improvement of antenna gain in comparison to standard dipole antennas, additionally to a potential increase of the THz power for photo-mixing applications.

THE recent progress on THz communications accelerated by photonic technologies [1] lead to a possible integration of THz devices in the next-generation communication systems (6G). However, as photonic-based Continuous-Wave (CW) THz sources are concerned, the output power is limited [2] and the coherence (spatial, temporal and polarization) is not sufficient to ensure sufficient signal-to-noise at reception for successful high-data-rate communications.

Among the possible coherent sources, we proposed the use of a Dual-Frequency Vertical-external-Cavity Surface-Emitting Laser (VeCSEL) based on the coexistence of two transverse modes operating around 1064 nm [3], and demonstrated coherent and tunable THz emission using two kinds of photomixers, either a commercial Uni-Travelling Carrier Photodiodes [4] or a plasmonic-based photoconductive antenna [5].

In this work, we propose a solution to improve the THz output power by taking advantage of the transverse structuration of the laser modes described in [3]. The idea is to collect all the optical beating spots available in the transverse Laguerre-Gauss modes of the dual-frequency VeCSEL based on dual transverse modes operation.


To this end, we designed MultiPolar Antennas (MPA) at 100 GHz as a proof-of-concept, as proposed in [6] but with the

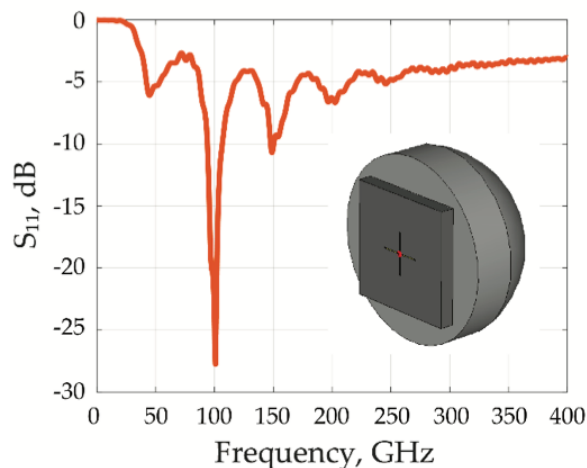

**Fig. 1.** Multipolar antenna based on 2 crossed dipoles designed at 100 GHz. Simulated  $S_{11}$  parameters shows that antenna adaptation can be verified for adequate antenna design. The inset shows an overview of the design the antenna mounted on a high-resistivity-Silicon Hyper-hemispherical lens.

objective to match with the specific dual-frequency VeCSEL optical excitation. Fig. 1 shows the design of 2 crossed dipoles on a conventional high-resistivity Si-lens, showing that adaptation can be achieved thanks to simulations realized using CST Studio suite. We will show how adaptation becomes challenging as the number of dipole arms increases, and show the effect of the polarity of each dipole arms. Indeed, polarity should alternate between each neighboring arm to match with the situation of optical transverse mode excitation.

The far-field and corresponding gain were calculated for the different configurations, showing that a higher gain can be obtained in comparison to standard dipole antennas (8 dBi versus 2.2 dBi). We will discuss about the possible compromises in terms of adaptation, gain and bandwidth of different kinds of multipolar antenna designs using 2 to 4 dipoles, for various possible excitation polarities.

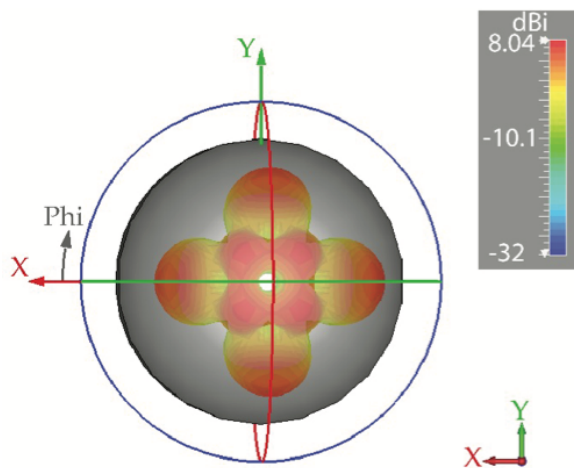

**Fig. 2.** Far-field pattern simulation for the multipolar antenna based on 2 crossed dipoles designed at 100 GHz. The maximum realized gain is 8 dBi.

This work was supported by ANR (Spatiotera), I-SITE MUSE AAP2021 (STAE).

## REFERENCES

- [1] T. Nagatsuma *et al.*, “Advances in Terahertz Communications Accelerated by Photonics,” *Nature Photonics*, vol 10, pp. 371–379, 2016
- [2] S. Dhillon *et al.*, “The 2017 terahertz science and technology roadmap,” *Journal of Physics D: Applied Physics*, vol. 50, no. 043001, 2017
- [3] R. Paquet *et al.*, “Coherent continuous-wave dual-frequency high-Q external-cavity semiconductor laser for GHz–THz applications,” *Optics Letters*, vol. 41, no. 16, pp. 3751–3754, 2016
- [4] S. Blin *et al.*, “Coherent and Tunable THz Emission Driven by an Integrated III–V Semiconductor Laser,” *IEEE Journal of Selected Topics in Quantum Electronics*, vol. 23, no. 1500511, 2017
- [5] A. Abbes *et al.*, “280 GHz Radiation Source Driven by a 1064nm Continuous-Wave Dual-Frequency Vertical External Cavity Semiconductor Laser,” *IRMMW-THz conference*, 2021
- [6] P. Meyer and D. S. Prinsloo, “Generalized Multimode Scattering Parameter and Antenna Far-Field Conversions,” *IEEE Transactions on Antennas Propagation*, vol. 63, no. 11, pp. 4818–4826, 2015